

# DATA SHEET E70c

## ACOUSTIC ENCLOSURE PANEL

### MODEL CP50/UF

IMPORTANT - THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A DATED AND CERTIFIED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

### SPECIFICATION

THE ACOUSTIC ENCLOSURE PANEL COMPRISES A COMBINATION OF SOUND ABSORBENT MATERIALS AND HIGH MASS BARRIERS CONTAINED WITHIN A METAL CASING HAVING AN PLAIN OUTER AND PERFORATED INNER FACE, OFFERING EXCELLENT SOUND REDUCTION AND ABSORPTION PROPERTIES.

PANELS ARE CONSTRUCTED FROM GALVANISED STEEL (SUFFIX G), ZINTEC (SUFFIX Z), PLASTIC COATED STEEL (SUFFIX L) OR ALUMINIUM (SUFFIX A).

THE OUTER CASING IS FORMED FROM PLAIN SHEET METAL AND INSIDE FACE FROM PERFORATED METAL.

PANELS CONTAIN A FIBROUS SOUND ABSORBENT INFILL THAT IS NON-SHEDDING, NON-COMBUSTIBLE, NON-HYGROSCOPIC AND CHEMICALLY INERT. THE INFILL IS FACED WITH GLASS CLOTH TO PREVENT FIBRE MIGRATION.


INFILL DENSITY- 45kg/m<sup>3</sup>.

INFILL THICKNESS -50mm.

THE CASING CAN BE SUPPLIED WITH A PERIMETER FLANGE FOR FIXING ADJACENT SECTIONS TOGETHER, FIXING THE PANELS INTO THE BUILDERSWORK OPENING OR FIXING INTO THE FRAMEWORK OF AN ACOUSTIC ENCLOSURE (OPTION F).

POLYESTER POWDER FINISH AVAILABLE (SUFFIX P)

### DIMENSIONS

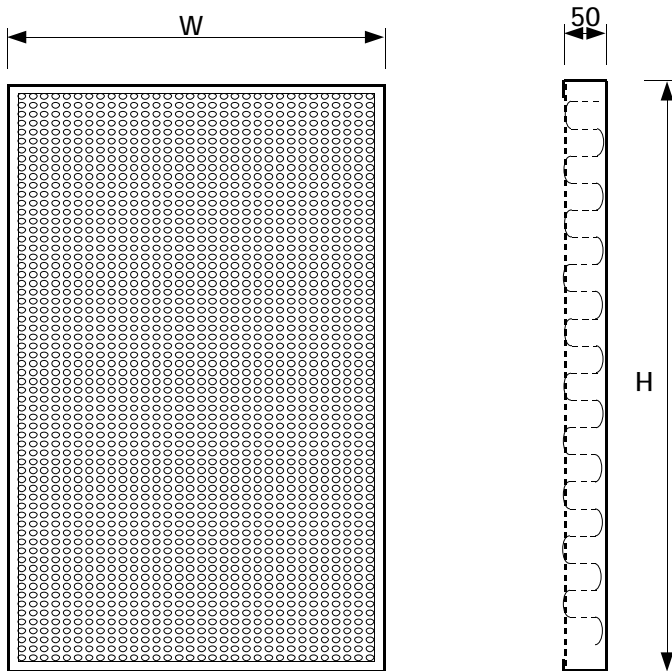

### NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE

PANELS WILL BE SUPPLIED WITHOUT SUPPORT STEELWORK, BRACKETS, FIXINGS OR MASTIC UNLESS OTHERWISE STATED.

PANELS MORE THAN 1800 WIDE OR 2500 HIGH MAY BE MANUFACTURED IN SECTIONS FOR ON SITE ASSEMBLY.

### SUFFIX

A - ALUMINIUM SUBSTRATE

G - GALVANISED STEEL SUBSTRATE

Z - ZINTEC SUBSTRATE

L - PLASTIC COATED STEEL

P - STOVED POLYESTER POWDER COAT

F - PERIPHERAL FIXING FRAME

SP - SPECIAL CONSTRUCTION, REFER TO EQUIPMENT SCHEDULE FOR DETAILS.

### FEATURES

ARCHITECTURAL/INDUSTRIAL APPLICATION

ALL METAL CONSTRUCTION

HIGH SECURITY

HIGH ACOUSTIC RATING

HIGH SOUND ABSORPTION

INTERNAL/EXTERNAL USE

OPTIONAL POLYESTER FINISH


OPTIONAL FIXING FLANGES



**ALLAWAY**  
**ACOUSTICS**  
LIMITED

[www.allawayacoustics.co.uk](http://www.allawayacoustics.co.uk)

### CONSTRUCTION

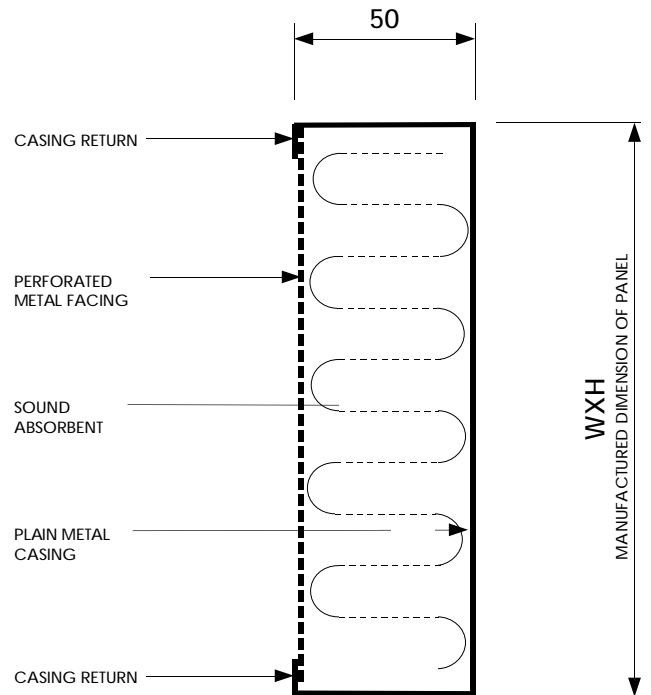

### ACOUSTIC PERFORMANCE

#### SOUND REDUCTION INDEX B.S.2750/3-1980

63	125	250	500	1000	2000	4000	8000	Hz
13	17	24	30	38	39	41	39	dB

#### SOUND ABSORPTION B.S.3638 -1987

63	125	250	500	1000	2000	4000	8000	Hz
.10	.25	.65	1.00	1.00	1.00	.95	.90	-

### WEIGHT

ACTUAL PANEL WEIGHTS ARE GIVEN ON THE EQUIPMENT SCHEDULE.

APPROXIMATE WEIGHT:  
20kg/M<sup>2</sup> GALVANISED

### BUILDERSWORK

THE W AND H DIMENSIONS GIVEN ON THE CERTIFIED EQUIPMENT SCHEDULE ARE AS MANUFACTURED.

ADEQUATE CLEARANCE MUST BE ALLOWED WHEN CONSTRUCTING THE BUILDERSWORK OPENING, MIN 10mm IS RECOMMENDED.

### STANDARD SIZES

THERE ARE NO STANDARD SIZES.

PANELS ARE MANUFACTURED TO ORDER.